



NEW

Donaldson MaxGrip™ Bent Bolt Clamps




For Muffler to Stack Connections



Offset MaxGrip™ Bent Bolt Clamps
Models for Muffler to Stack Connections

Nominal I.D. in	mm	Functional I.D. Range inches	mm	Part Number
4.00	102	4.04-4.21	103-107	M002164
5.00	127	5.04-5.21	128-132	M001865

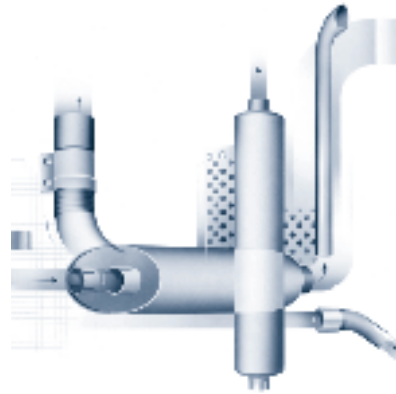

For Tube to Flex Connections



Offset MaxGrip™ Bent Bolt Clamps
Models for Tube to Flex Connections

Nominal I.D. in	mm	Functional I.D. Range inches	mm	Part Number
4.00	102	4.04-4.21	103-107	M002134
5.00	127	5.04-5.21	128-132	M002135

Donaldson introduces two new offset styles of the popular bent bolt clamp—the Offset MaxGrip™ bent bolt clamp. One style is for muffler to stack connections and the other for tube to flex connections.

Donaldson MaxGrip™ clamps are made of heavy duty aluminized steel to minimize corrosion.

- Reusable
- Heavy-duty construction for long life and durability
 - Aluminized band
 - Stainless steel welds
 - Deburred strap edges
 - Heat resistant aluminum paint
- Self positioning for easy installation
- U.S. Patent 6,305,054, 4,558,891 and others pending

EXHAUST
Donaldson

MaxGrip™ Bent Bolt Clamp

Features

- More holding power than any other clamp tested
- Reusable
- Coated bolts and threads
- Hardened flange nuts
- Heavy-duty construction for long life and durability
 - Aluminized band
 - Stainless steel welds
 - Deburred strap edges
 - Heat resistant black paint



MaxGrip Bent Bolt Clamp

Nominal I.D. in	mm	Functional I.D. Range inches	mm	Part Number
1.75	44	1.79-1.96	45-50	M001866 ⁽¹⁾
2.00	51	2.04-2.21	52-56	M001867 ⁽¹⁾
2.50	64	2.54-2.71	65-69	M001756 ⁽¹⁾
3.00	76	3.04-3.21	77-82	M001702
3.50	89	3.54-3.71	90-94	M001502
3.75	95	3.73-3.90	95-99	M001593
3.88	99	3.89-4.06	99-103	M001432
4.00	102	4.04-4.21	103-107	M001503
4.25	108	4.21-4.38	107-111	M001566
4.50	114	4.54-4.71	115-120	M001703
5.00	127	5.04-5.21	128-132	M001668
5.25	133	5.21-5.38	132-137	M001504
6.00	152	6.04-6.21	153-158	M001505
6.25	159	6.21-6.38	158-162	M001799
6.75	171	6.83-7.00	173-178	M001506

(1) 1.12" (28 mm) band width. Use on 1" minimum slots. Requires 9/16" or 14mm wrench for installation.

All models except the M001866, M001867 and M001756 have 1.5" (38 mm) band. Use on 1.375" minimum slot. Requires 5/8" or 16mm wrench for installation.

Suggested Uses

- Slotted, lapped tube connections, manifold connections and muffler ends.
- Provides maximum sealing on all forms of tube slots



Donaldson

Donaldson Company, Inc.
Minneapolis, MN
55440-1299

© 2001
Printed in the U.S.A.
Equal Opportunity Employer
Donaldson Company, Inc. reserves the right to
change or discontinue any model or specification
at any time and without notice.

United States & Canada
Tel: 800-374-1374
www.donaldson-filters.com

**Latin America
& Caribbean**
Tel: 952-887-3149

Mexico
Tel: 52-53-627320

Italy
Tel: 39-386-30211

Germany
Tel: 49-25-94-7810

Belgium
Tel: 32-16-383811

United Kingdom
Tel: 44-1482-835-213

Hong Kong
Tel: 852-2-402-2830

Singapore
Tel: 65-546-4400

South Africa
Tel: 27-21-530-2900

Australia
Tel: 61-2-4352-2022